


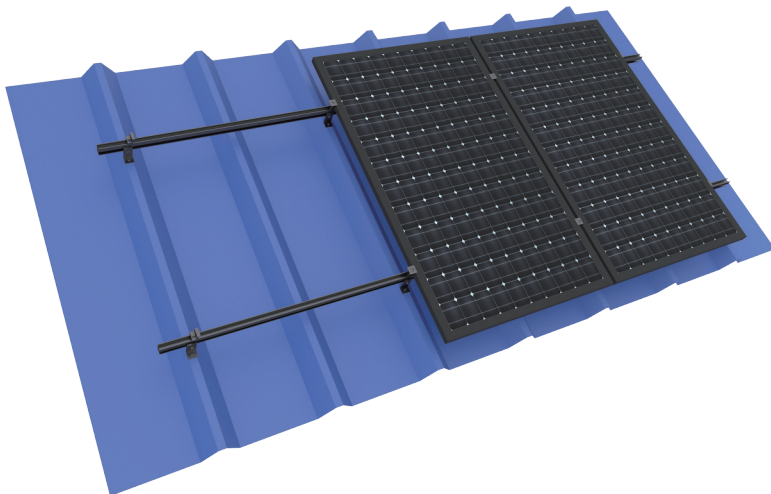

## Technical Parameter

**Tilt Angle:** 0°

**Wind Load:** 60m/s

**Snow Load:** 1.6KN/m<sup>2</sup>

**L-feet Material:** SUS304&AL6005-T5

**Design Standard:**

AS/NZS 1170, DIN 1055, JIS C8955:2017,

International Building Code IBC 2009,

California Building Code CBC 2010;

**Color:** Silver or Customized Color


**Warranty:** 10-year warranty

**Packing:**


Rail: 6pcs/bundle, 96 bundles/pallet, 576pcs/pallet

4 panel Kits 20ft: 864kits tin, 648kits tile, 506kits tilt


4 panel Kits 40ft: 2004kits tin, 1728kits tile, 1056kits tilt

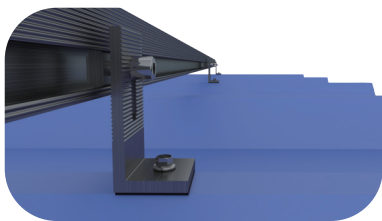

L-feet to Rail

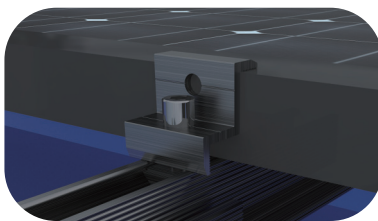

End Clamp Fixing

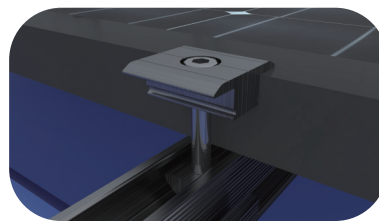

Inter Clamp Fixing

|   | Item No.    | Description                                  | 4 Panel | 6 Panel | 8 Panel | 10 Panel | 12 Panel |
|---|-------------|----------------------------------------------|---------|---------|---------|----------|----------|
| ① | MR-MA-4.4   | MA Rail 4400mm                               | 2       | 3       | 4       | 5        | 6        |
| ② | MR-SP-MA    | MA Splice kit for MA Rail                    | 2       | 2       | 4       | 4        | 6        |
| ③ | MR-EC-MA    | End Clamps Kit (35/40mm)                     | 4       | 8       | 8       | 12       | 12       |
| ④ | MR-IC-MA    | Inter Clamps Kit (35/40mm)                   | 6       | 10      | 14      | 16       | 18       |
| ⑤ | MR-VI-01/MA | L-feet Kit                                   | 10      | 12      | 16      | 20       | 24       |
| ⑥ | MR-IS-GL/MA | Grounding Lug                                | 2       | 3       | 4       | 5        | 6        |
| ⑦ | MR-IS-GC/MA | Grounding Clip                               | 3       | 5       | 7       | 8        | 9        |
| ⑧ | MR-IS-CC/N  | Cable Clip under module frame (for 2 cables) | 4       | 6       | 8       | 10       | 12       |

