

Alignment Guides


- ▶ Easily align flashing with chalk line
- ▶ Ensures solid rafter connection

Structural Ribs

- ▶ Adds rigidity to flashing
- ▶ Avoids deflection


3 levels of waterproofing

- ▶ EPDM sealing washer on lag bolt
- ▶ Butyl gasket seals L-Foot-Flashing connection
- ▶ Dome provides fully encapsulated raised seal

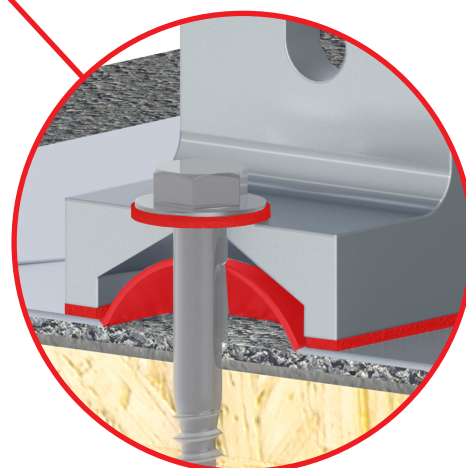

EverFlash XP Comp Kit

TECHNICAL SHEET

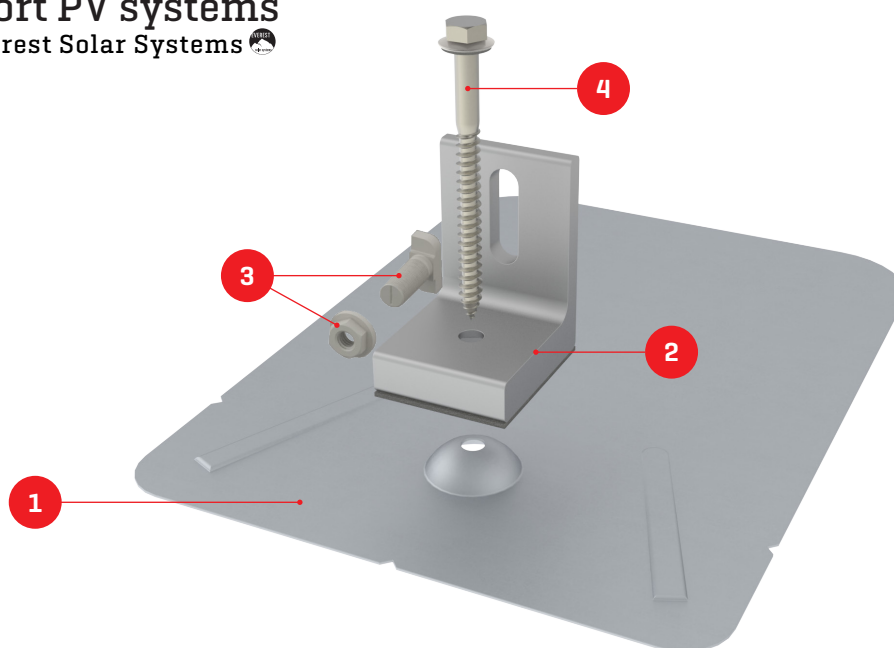

Item Number	Description	Part Number
1	EverFlash XP Comp Flashing	4000057 EverFlash XP Comp Kit, Mill LF, Dark Flash
2	EverFlash XP L-Foot	4000060 EverFlash XP Comp Kit, Dark 4000061 EverFlash XP Comp Kit, Mill
3	T-Bolt & Hex Nut	
4	5/16" Lag Screw w/ EPDM Washer	

Technical Data

	EverFlash XP Comp Kit
Roof Type	Composition/asphalt shingle
Flashing Material	Galvalume [Mill] Painted galvalume [Dark]
L-Foot Material	Aluminum
Hardware Material	Stainless steel
Finish	Mill and Dark
Roof Connection	5/16" x 4" SS Lag Screw
Compatibility	CrossRail 44-X, 48-X, 48-XL, 80
Water Proof Testing	Water seal tested to UL 441 Section 27 rain test TAS 100-95 wind driven rain test Full submersion water test
Structural Testing	ASTM D 1761-12
Bonding	UL 2703 Listed L-Foot
Box/Kit Quantity	20