



430 - 450 Wp

AXITEC[®]
high quality german solar brand

AXIpremium XL HC

High performance solar module

144 halfcell, monocrystalline




German-American-Engineering

The advantages:

- 15 Years** 15 years Manufacturer's warranty
- HC** High module performance through Half-Cut-technology and selected materials
- + Wp** Guaranteed positive power tolerance from 0-5 Wp by individual measurement
- 100%** 100 % visual electroluminescence inspection in production
- Frame** High stability due to innovative frame design
- IP 68** High quality junction box and connector systems

Exclusive linear AXITEC high performance guarantee!

- 15 years manufacturer's guarantee on 90 % of the nominal performance
- 25 years manufacturer's guarantee on 85 % of the nominal performance

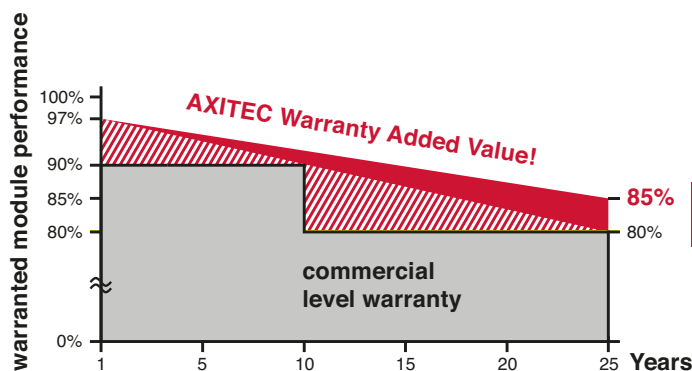

1 - 8 % more power
after 25 years



Conforms to UL STD No.1703
Certified to ULC/ORD Std. C1703

AXIpremium XL HC 430 - 450 Wp

Electrical data (at standard conditions (STC) irradiance 1000 watt/m², spectrum AM 1.5 at a cell temperature of 25°C)

Type	Nominal output P _{mpp}	Nominal voltage U _{mpp}	Nominal current I _{mpp}	Short circuit current I _{sc}	Open circuit voltage U _{oc}	Module conversion efficiency
AC-430MH/144V	430 Wp	40.70 V	10.57 A	11.31 A	48.50 V	19.78 %
AC-435MH/144V	435 Wp	40.90 V	10.64 A	11.39 A	48.70 V	20.01 %
AC-440MH/144V	440 Wp	41.10 V	10.71 A	11.46 A	48.90 V	20.24 %
AC-445MH/144V	445 Wp	41.30 V	10.78 A	11.53 A	49.10 V	20.47 %
AC-450MH/144V	450 Wp	41.50 V	10.85 A	11.60 A	49.30 V	20.70 %

Design

Frontside	0.13 inch (3.2 mm) hardened, low-reflection white glass
Cells	144 monocrystalline high efficiency cells
Backside	Composite film
Frame	1.38 inch (35 mm) silver aluminium frame

Mechanical data

L x W x H	82.44 x 40.87 x 1.38 inch (2094 x 1038 x 35 mm)
Weight	52.47 lbs (23.8 kg) with frame

Mechanical load

Design load (pressure/suction)	33.3 PSF / 33.3 PSF
Test load (pressure/suction)	50 PSF / 50 PSF

Power connection

Socket	Protection Class IP68
Wire	47.24 inch, AWG 12
Plug-in system	Plug/socket IP68, Stäubli MC4 / Stäubli EVO2

Limit values

System voltage	1500 VDC (UL) 1000 VDC (IEC)
Module Fire Performance	TYPE 1 (UL 1703) or CLASS C (IEC 61730)
NOCT (nominal operating cell temperature)*	45°C +/-2K
Reverse current feed IR	20.0 A

Permissible operating temperature	-40°C to 85°C / -40F to 185F
--------------------------------------	------------------------------

(No external voltages greater than V_o
may be applied to the module)

* NOCT, irradiance 800 W/m²; AM 1.5;
wind speed 1 m/s; Temperature 20°C

Temperature coefficients


Voltage U _{oc}	-0.27 %/K
Current I _{sc}	0.048 %/K
Output P _{mpp}	-0.35 %/K

Low-light performance (Example for AC-450MH/144V)

I-U characteristic curve	Current I _{pp}	Voltage U _{pp}
200 W/m ²	2.22 A	39.94 V
400 W/m ²	4.47 A	40.40 V
600 W/m ²	6.68 A	40.72 V
800 W/m ²	8.84 A	41.06 V
1000 W/m ²	10.85 A	41.50 V

Packaging

Module pieces per pallet	30
Module pieces per HC-container	660

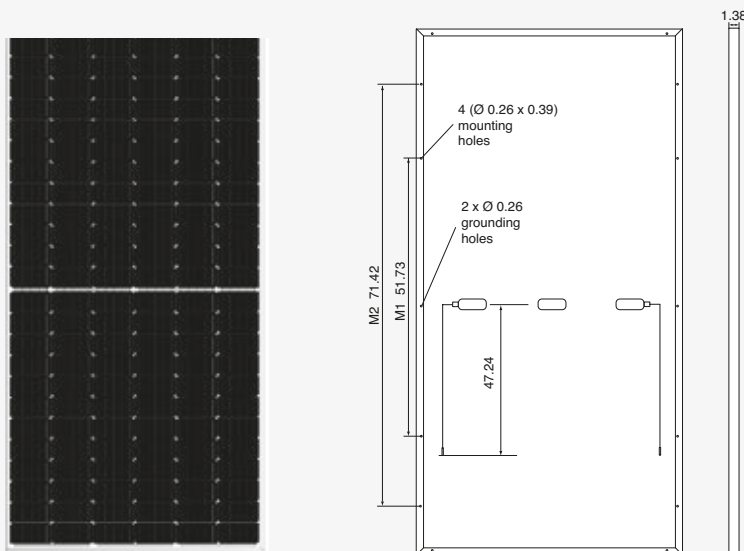

All dimensions in inch